UQ-50DC RS485 Motor



504A8 1134022









Data & Power Cable Length

A new generation of intelligent motors that are controlled and monitored via Somfy digital network solutions and animeo® IP total solar management system.

10 in. (250 mm)

Technical Features

Voltage Supply 24V DC
Index Protection Rating IP 20 (interior)
Limit Switch Type Electronic
Limit Switch Capacity 38 Turns

Temperature 32°F to 140°F (0°C to 60°C) Working Range (Interior use only)

Insulation Class Class 111

Wiring In accordance with NEC and local electrical codes.

Dimensions



L1	30.7 in (780 mm)
L3	31.5 in (800 mm)

Specifications

 * Minimum Torque: Minimum application weight to ensure smooth

operation.


** Sound Level: According to standards ISO 3741 NF 31022 in dBA

ref 1pW at nominal torque without end product.

Fabrication Recommendations:


- Operational noise level is reduced when motor, tube, and mechanical accessories are properly adapted to motorized applications.
- Free play must be minimized between the accessories and the end product tube to ensure quiet performance of the motor.
- Due to the variances of standard aluminum extrusion tolerances, it is recommended to screw the drive wheel & pin end to immobilize them and ensure quiet performance throughout the life of the product. Interior Tube Diameter (ID) > 47.5 mm must be respected.
- A motor crown adaptor between motor and end product tube is required to ensure concentric operation of motor.
- 500 Series Drive Stop and Screw (9910004) is recommended to prevent noise and drive wheel separation from motor shaft.
- Somfy Soft Clip Drive Wheel Adaptors (brown in color) are not recommended.

Pigtail: Data and Power

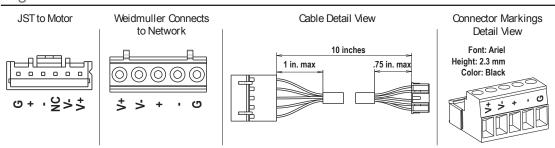

Torque	4 Nm
* Minimum Torque	0.4 Nm
Nominal Voltage	24 V DC
Rated Current	1.5A
Speed	10-25 Adjustable
Thermal Protection	5 minutes
** Sound Level	≤38dBA





GAUGE	LENGTH
14 AWG	240 Ft.
16 AWG	150 Ft.
18 AWG	100 Ft.